


# Stubble-work plough great depth V-GP (arm 40x40 AL)



## Standard equipment:

- › 100x100x8 mm structural chassis. up to VG-9 PH model inclusive.
- › 200x100x8 mm structural chassis on VG-10 and VG-10 PH models.
- › 40 X 40 high arm as standard.
- › Separation between work rows of: 360 mm..
- › Separation between bodies: 525 mm
- › Swing hitch.
- › Tie Non Stop system with double reinforcement spring length 350 mm.
- › Standard metal wheel on all models (1 unit)
- › **The VG-9 and VG-10 models are not suitable for driving on public roads.**

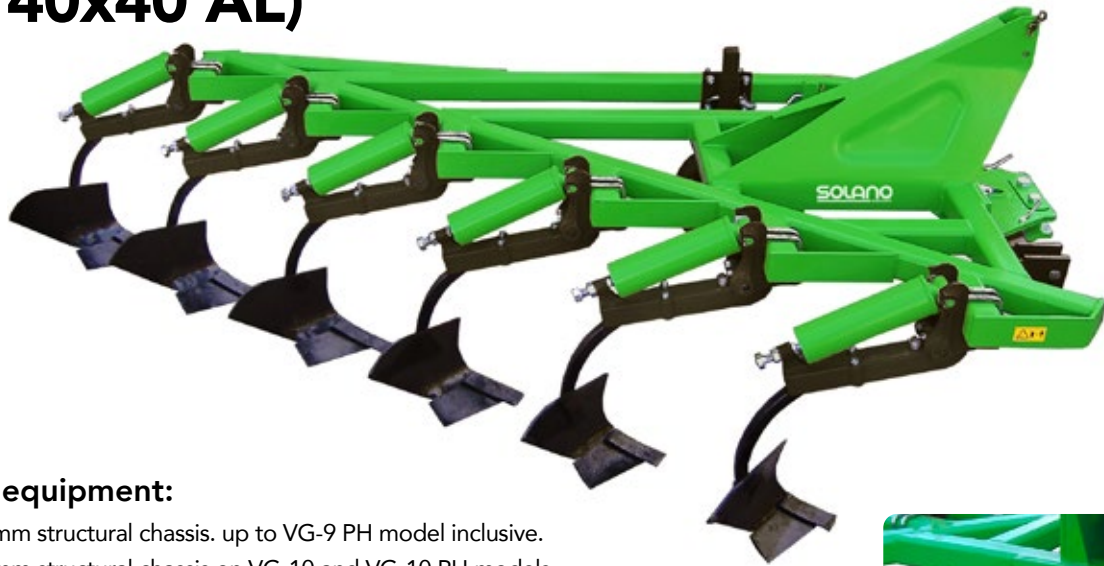

Swing hitch detail

CODE	MODEL	ARMS		WIDTH (m)		WEIGHT (Kg)	POWER (CV)
		Total	Separation	Work	Transport		
1011040011	V-6 GP	6	---	2,16	2,16	1.020	100-110
1011040014	V-7 GP	7	--	2,52	2,65	1.160	110-130
1011040001	V-8 GP	8	--	2,88	3	1.280	130-160
1011040019	V-8-PH GP	8	6+2	2,88	2,8	1.405	130-160
1011040021	V-9 GP	9	--	3,24	3,38	1.440	160-180
1011040024	V-9-PH GP	9	7+2	3,24	3,05	1.580	160-180
1011040003	V-10 GP	10	--	3,6	3,75	1.700	180-200
1011040006	V-10-PH GP	10	2+6+2	3,6	2,65	1.840	180-200

## Options



Increase by hydraulic folding

CODE

2011040001



Increase by manual folding

CODE

2011040003



Increase pneumatic wheel (10,0/75-15,3")

CODE

2011040006



2nd metal wheel increase

CODE

2011040005