


Subsoiler SB and SBR

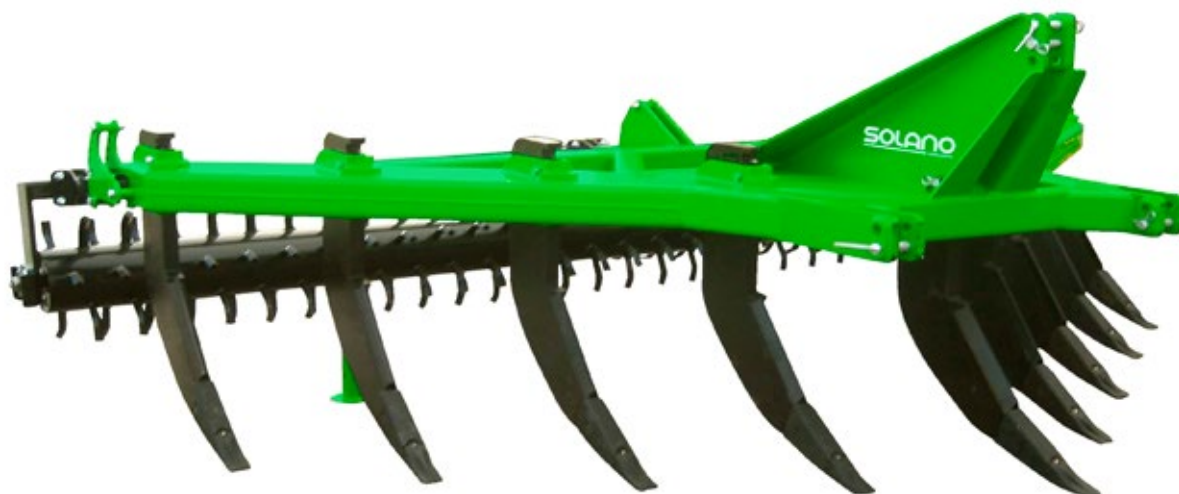

Standard equipment:

- › Arms 30,40 and 50 mm thick, made in one piece with wear plate.
- › Angular chassis profile to avoid dragging.
- › Standard hooks with category 2 bolts for SB models and category 3 for SBR models.
- › Robust and easily adjustable roller anchors.
- › Exchangeable toe boots.

CODE	MODEL	ARMS			TRANSPORT	WORK		WEIGHT (Kg)	POWER (CV)
		Total	Width	Distance	Width	Work	Deep		
1011050001	SB 3/5-450-30	3	30 mm.	450 mm.	1,65 m.	1,95 m.	640 mm.	480	50-70
1011050002	SB 5/7-470-40	5	40 mm.	470 mm.	2,05 m.	2,35 m.	640 mm.	720	80-100
1011050004	SBR 5/7-500-40	5	40 mm.	500 mm.	2,15 m.	2,5	825 mm.	940	125-150
1011050005	SBR 7/7-470-50	7	50 mm.	470 mm.	3	3,3	825 mm.	1.450	170-200
1011050006	SBR 9/9-470-50	9	50 mm.	470 mm.	3,9	4,25 m.	825 mm.	1.860	220-260

Options

Rollers



2 Rows Horizontal folder

FOR MODEL:	Roller SBR Ø 600 mm. 25 mm			Roller Packer Ø 500 mm.		
	CODE	Width (m)	Kg	CODE	Width (m)	Kg
SB 3/5-450-30	2011050006	2,15	235	2011050001	2,15	235
SB 5/7-470-40	2011050007	2,55	280	2011050002	2,55	280
SBR 5/7-500-40	2011050008	2,7	320	2011050003	2,7	320
SBR 7/7-470-50	2011050009	3,5	450	2011050004	3,5	450
SBR 9/9-470-50	2011050010	4,75	560	2011050005	4,75	560

