


# Disc harrows SH (Center wheels)



CODE	MODEL	DISCS				TIRES	WIDTH (m)		WEIGHT (Kg)	POWER (CV)
		Núm.	Supports	Diameter	Separation		Work	Transport		
1011080013	SH-25-20-26	20	8	26" - 66	250 mm.	10.0/75-15.3" (12PR)	2,41	2,75	1.810	90-100
1011080014	SH-25-20-28	20	8	28" - 71	250 mm.	10.0/75-15.3" (12PR)	2,41	2,75	1.890	90-100
1011080015	SH-25-22-26	22	8	26" - 66	250 mm.	10.0/75-15.3" (12PR)	2,66	2,95	1.950	100-110
1011080016	SH-25-22-28	22	8	28" - 71	250 mm.	10.0/75-15.3" (12PR)	2,66	2,95	2.080	100-110

## Standard equipment:

- › Separation between SH-25 discs: 25 cm.
- › Models with rectangular tubular chassis suspended 160x80x8 mm.
- › 250x100x8 mm disc carrier chassis.
- › Eccentric shot.
- › Hydraulic control for the activation of the opening or closing of the harrow or the pneumatic wheel unit or the lance.
- › Filming system provided with MONOBLOC self-aligning housings of ball bearings protected with triple-sealed seals that SIMPLIFY THE NEED FOR LUBRICATION.
- › Solid steel frame shaft (F-114) 40x40 mm for all models..
- › Standard simple discs. **(26" discs as standard in 6 mm and 28" as standard in 7 mm of thickness.)**

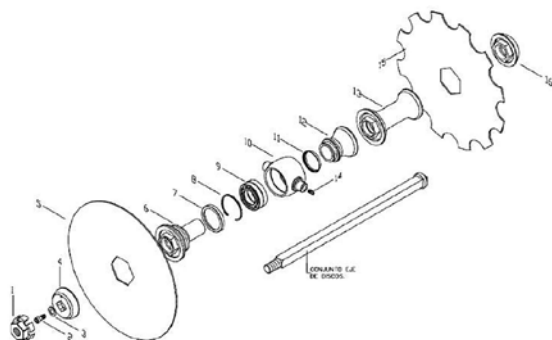

25 reel rolling assembly

## Options



Hydraulic adjustment of cloth level

CODE

2011080001



Hydropneumatic damping

CODE

2011080002



Hydraulic Spear Shifter

CODE


2011080003



Additional support point increase (price per unit):

CODE

2019020004



28" disc increment in 8 mm (price per unit):

CODE

2019020001



280 mm disc separation increment (price per unit):

CODE

2019020002






Bearing housing protector (price per unit):

CODE

2019020003

## Rollers



FOR MODEL:	Cage roller Ø 400 mm. 10 rows - 25 mm			Cage roller Ø 550 mm. 9 Rows - 25 mm			Cage roller Ø 550 mm - 10 Wavy bars 60x8 mm		
	CODE	Width (m)	Kg	CODE	Width (m)	Kg	CODE	Width (m)	Kg
SH-25-20	2011080006	2,7	290	2011080014	2,7	320	2011080022	2,7	320
SH-25-22	2011080007	3	340	2011080015	3	390	2011080023	3	390

