



# High performance olives harvesters for "young olive trees" with front umbrella

Serie 130. Vibration by closed circuit of pistons

## Standard equipment:

- › Control of hydraulic functions of movement through distributor high efficiency calibrated monobloc.
- › Umbrella and clamp opening movement simultaneously.
- › Independent umbrella opening regulation.
- › Front umbrella: Ø 6 m, lightweight design and reinforced structure
- › Monomass vibrating heads. System of orbital multiple vibration in both directions to be mounted on the arms of a front-loader. Hydraulic pistons system.
- › Harvesting box.
- › **1** Rear hydraulic central hitched on the 3 points of the tractor, quick hydraulic plugs, counter-weight (in option), visual gauge for the level and temperature of the oil, thermostat, cooling system, suction and return filters.
- › **2** In-cab electronic control box..
- › **3** Tree entry camera.
- › **4** Adaptable hooks to different front loaders sizes
- › **5** Bass umbrella.
- › **6** Adjustable umbrella back.
- › PTO SHAFT 1000 r.p.m.
- › Optimal working revolutions: 880 r.p.m.

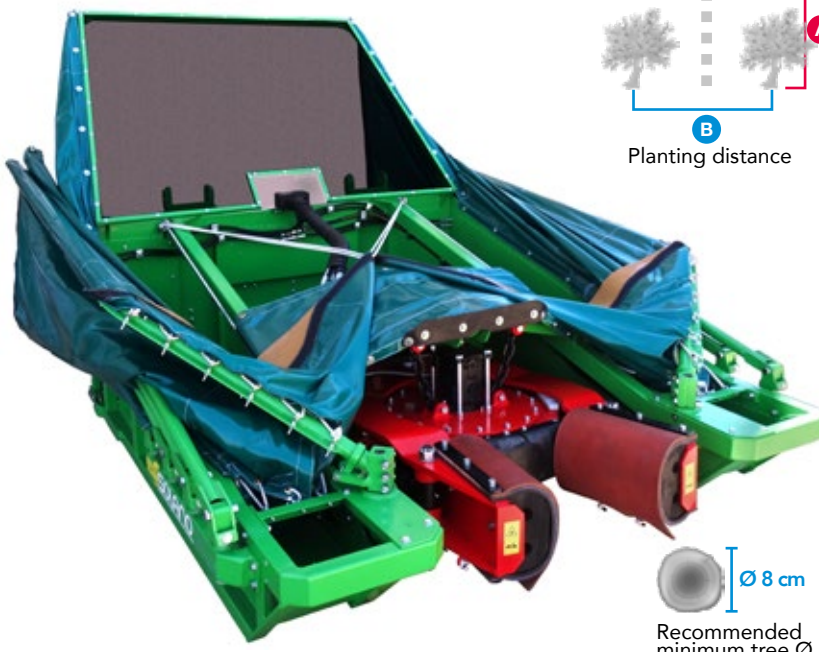

CODE	MODEL	PUMP CONTROL	UMBRELLA			MINIMUM TRACTOR POWER (CV)	MINIM. PLANTING DISTANCE (m)*	
			Bass umbrella	Width (cm)	Ø (m)		A	B
1041010031	R60 OLJ	Sirga	•	110	6	100	5	5

• Available | x: Not available | **Auto.:** Automático | (\*) Minimum advisable planting distance

## Options



**Increment for umbrella (Ø of increment until 7 m máx.)**

CODE  
2049010006



**Increment per joystick**

CODE  
2049000001



**Increase by self-regulating pump instead of Sirgas**

CODE  
2041010026